
## PARTITION FIXING

Suitable for both Fire Rated and Non Rated Applications. Frame to be installed during construction of the wall. Profile can be modified to suit various channel sizes and sheet thicknesses.

The frame and once installed, can sit either flush with the wall or proud of the wall dependant on the size of the frame returns. Frame is secured by driving screws through the extended fins into the side of the wall channel. Suitable for installation where nibs less than 300mm are provided from a sheer wall. Partiton fixed frame generally require additional finishing (i.e. corner bead) between the junction of the wall sheeting and the frame.

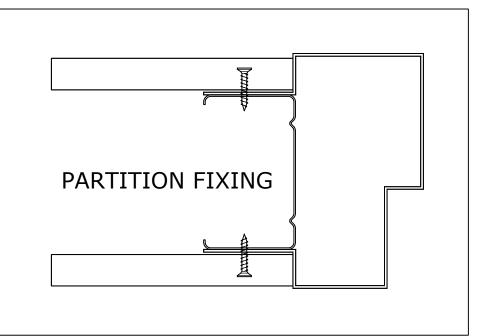

Taylors Doors & Frames Pty Ltd	General Notes:	Drawn By: Peter Mole	Sheet:
20 Orchard Road Brookvale NSW 2100		Date: 13th October 2016	1 of 1
Ph: + 61 2 9905 1222 Email: admin@taylorsdoors.com.au	www.taylorsdoors.com.au	Drawing ID: PWFixingOptionsPF	Revision: B