


STRAP FIXING

Suitable for both Fire Rated and Non Rated Applications. Frame to be installed during construction of the wall. Profile can be modified to suit various channel sizes and sheet thicknesses. No additional finishing (i.e. corner bead) of junction between wall sheet and frame.

The frame, once installed, sits proud of the finish wall. Not suitable if flush finish to wall is required by your specification. Frame is secured by driving screws through the back of the channel into the stap welded to the back of the frame. May be difficult to install where nibs less than 300mm are provided from a sheer wall.

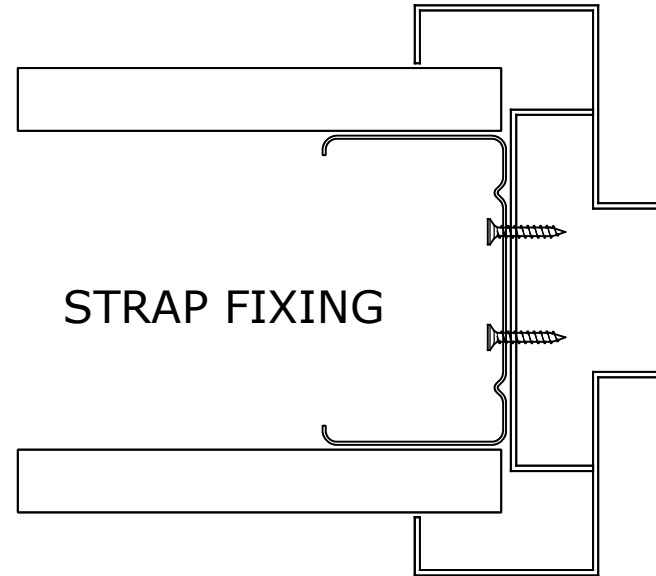

Taylor's Doors & Frames Pty Ltd

20 Orchard Road
Brookvale NSW 2100
Ph: + 61 2 9905 1222
Email: admin@taylor'sdoors.com.au

General Notes:

www.taylor'sdoors.com.au

Drawn By: Peter Mole

Date: 13th October 2016

Drawing ID: PWFixingOptionsSF

Sheet:

1 of 1

Revision: B